


Decontamination modules and systems

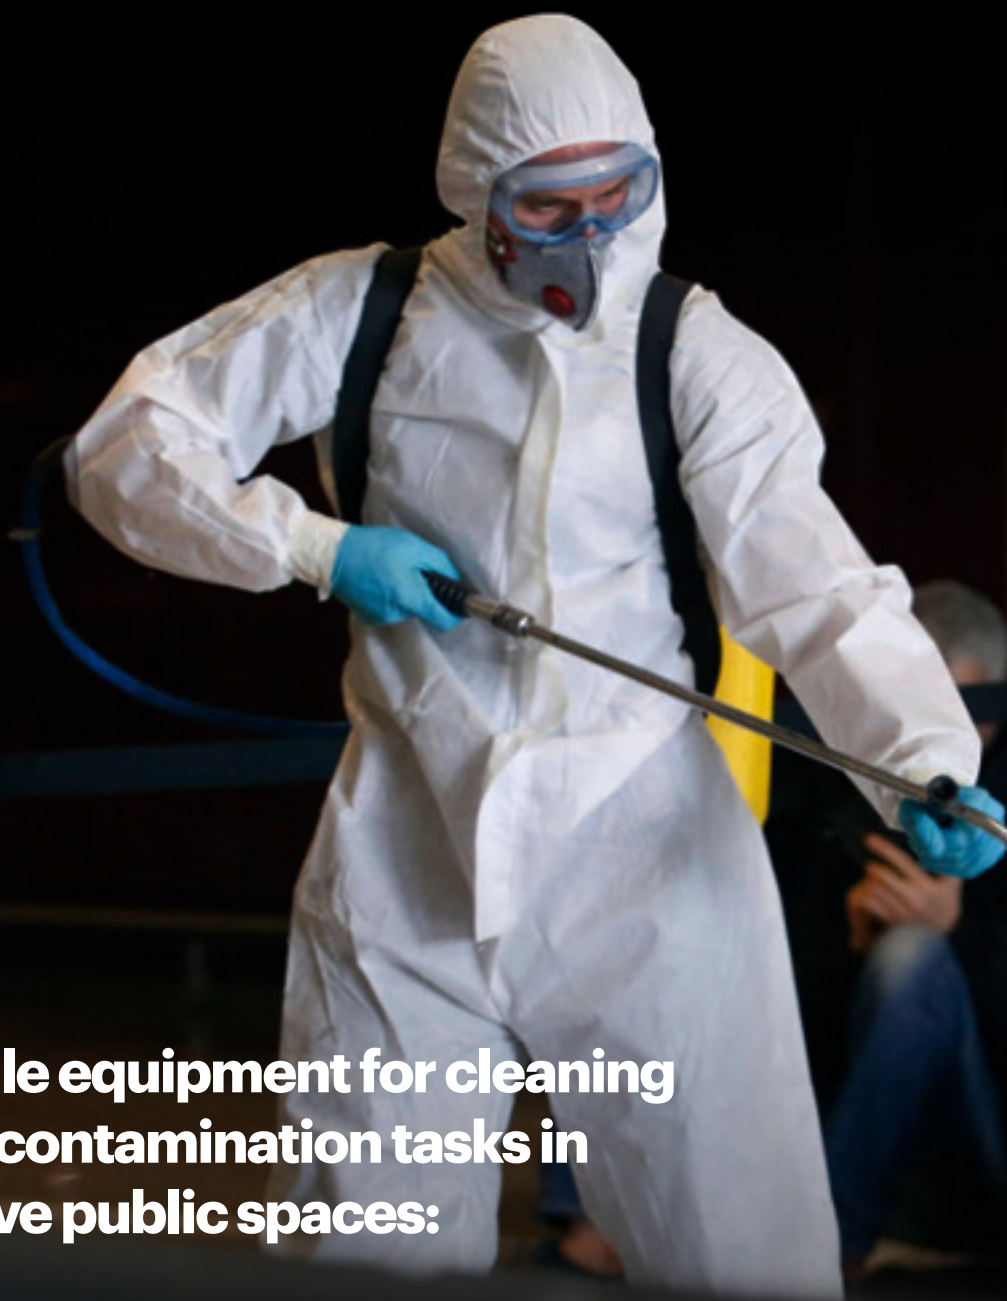

**Versatile equipment for cleaning
and decontamination tasks in
sensitive public spaces:**

- ✓ Airports
- ✓ Bus and train stations
- ✓ Metro stations
- ✓ ATMs
- ✓ Streets and building's entries
- ✓ Nursing homes

Sprayer backpack 20 liters

182,35€

Ergonomic and versatile. Designed to be used in extinction and decontamination maneuvers. Able to emit a continuous adjustable jet: concentrated / spray with a flow of up to 8 l/min at a distance of up to 12 meters.



Features

- A large filling cap with built-in filter.
- Pocket and Velcro® straps on the side for the nozzle.
- Padded straps on the shoulders and waist for more comfort.
- An Alice Clip system to personalize the belt.
- A quick connection/disconnection system.
- Dimensions 62 x 48 x 5 cm.
- Capacity: 20 liters
- Total weight: 2,54 kg.
- Backpack's weight: 1,48 kg.
- Nozzle's weight 1,06 kg.
- Nozzle's length: 1 m.
- Jet scope + / - 12mts, spray scope 3 meters

vft

Flexible sprayer backpack of 18 liters

140,18€

Extinguishing flexible backpack to be used in decontamination tasks. Safe storage, ease of use and of great efficiency. Able to emit a continuous adjustable jet: concentrated / spray with a flow of up to 120 cm³/cycle at a distance of up to 8 meters.



Features

- Capacity of 18 liters.
- Tank: Heat-sealed canvas reinforced with synthetic fabric.
- Chrome-plated brass nozzle with plastic grip handles.
- Filler neck 100 mm, with waterproof cap.
- Measurements: height 64,5 cm x width 48,5 cm
- Empty weight: 950grs.
- Jet scope + / - 12mts, spray scope 3 meters.

vft

Rigid sprayer backpack of 17,5 liters

126,93€

Extinguishing rigid backpack to be used in decontamination tasks. Able to emit a continuous adjustable jet: concentrated / spray with a flow of up to 120 cc./per stroke at a distance of up to 7 meters.



Features

- Capacity of 17.5 liters.
- Tank: Yellow polyethylene.
- Metal nozzle with plastic grip handles.
- Measurements: 38 x 20 x 49,7 cm
- Empty weight: 2 Kg.
- Non folding hose to avoid obstructions in use.
- Jet scope + / - 7 meters, spray scope 4 meters.

Manual sprayer

Raptor 12: 44,52€

Raptor 16: 49,25€

Manual hydraulic sprayer for application of agrochemicals. High quality materials, ease of use, lightness and without the need for cutting tools.



Features

- Filler neck diameter: 12,5 cms
- Maximum pressure: 6 bar
- Capacity: 680cc (air + water)
- Adjustable nozzle collar.
- Fiberglass nozzle with support.
- Grip with viton seals
- Padded straps

Tank

- Fabrics: polypropylene
- Capacity Raptor 12 model: 13,8 Lts
- Capacity Raptor 16 model: 16,950 Lts

vft

Decontamination skid unit with flexible tank

from 3.592€

Rapid intervention skid unit for extinguishing and decontaminating tasks with water tank made of flexible canvas. Easy to assemble and disassemble in pickup vehicles and trailers.

Water nozzle included.

Tank

- Fabrics: high tenacity polyester canvas.
- Capacity: 400 and 700 liters.
- Suction port in the frontal plane.
- Filling port in the upper plane.
- Customizable capacities on demand.



Available configurations

Membrane pump

| Ref. VFT | Tank | Engine | Power | Pump | Max Pressure | Max flow | PVP |
|---------------|-------|-------------|--------|------|--------------|----------|----------------|
| DVD1140-G31AO | 400 l | Honda GX160 | 4,8 HP | AR30 | 40 bar | 36 l/min | 3.592 € |
| DVD1170-G31AO | 700 l | Honda GX160 | 4,8 HP | AR30 | 40 bar | 36 l/min | 3.822 € |

Decontamination skid unit with polyethylene tank

from **4.851€**

Rapid intervention skid unit for extinguishing and decontaminating tasks with water tank made of polyethylene. Easy to assemble and disassemble in pickup vehicles and trailers.

Fast-winder and nozzle included

Tank

- Fabrics: Made of one-piece polyethylene.
- Capacity: 400 and 600 liters.
- Water level indicator.
- Inlet to load the tank by suction with absorption oversleeve.
- Stopcock (T) for deposit and absorption.
- Manhole for inspection of the interior of the tank.



Available configurations

Membrane pump

| Ref. VFT | Tank | Engine | Power | Pump | Max pressure | Max flow | PVP |
|---------------|--------|-------------|--------|------|--------------|----------|----------------|
| DVD1240-G31AO | 400 l. | Honda GX160 | 4,8 CV | AR30 | 40 bar | 36 l/min | 4.851 € |
| DVD1260-G31AO | 600 l. | Honda GX160 | 4,8 CV | AR30 | 40 bar | 36 l/min | 4.885 € |



What kind of disinfectants can be used?

- Hydrogen peroxide (oxygenated water)
- Soaps
- Quaternary ammonium
- Alcohols
- Sodium hypochlorite (bleach)

Important warning

We strongly recommend to clean the equipment with water after each use

www.vallfirest.com

Follow us

